

# DTV

## High Current Discharge Battery Testing System



### Applications

- Cold Crank Testing to industry standards: IEC, SAE, BCI
- Discharge capacity performance testing to thousands of amperes

### Features & Benefits

Bitrode's model DTV is a system designed for testing high current applications. The DTV also supports data collection on a full range of external inputs for specific laboratory requirements including: Thermocouples, PT-100, high impedance voltage, pressure, and specific gravity.

Additional features include:

- No performance loss under voltage control
- Bipolar capacity for discharging to below zero volts
- Test control and data management with Bitrode's VisualCN Lab Client software suite
- Constant current, constant power or constant voltage control
- Optional inputs can be assigned to any channel
- Program execution is independent from the PC with VisualCN software
- Remote Binary Protocol via Ethernet connection available for 3rd party software control
- Discharge power recycled to AC line for cooler, more energy-efficient operation



### General Specifications

<b>Voltage:</b>	0-72V
<b>Current:</b>	Up to 3000A up to 12,000A with external PCC
<b>Power:</b>	up to 90kW up to 360kW with external PCC
<b>Accuracy:</b>	±0.1% of FS*
<b>Circuits:</b>	1
<b>Data Sampling Rate:</b>	up to 10ms

\*Accuracy values are conservative assuming operation will be through the standard temperature range of 0-40° C and RH from 10-90% (non-condensing). Units calibrated and maintained in a temperature and humidity controlled environment can expect an accuracy of 0.02-0.05%FS.

BITRODE HEADQUARTERS  
9787 Green Park Industrial Drive  
St. Louis, Missouri 63123 - USA  
tel: +1 636 343-6112  
fax: +1 636 343-7473  
email: [info@bitrode.com](mailto:info@bitrode.com)

SOVEMA  
Via Spagna, 13  
37069 Villafranca di Verona - Italy  
tel: +39 (045) 6335711  
fax: +39 (045) 6303911  
email: [info@sovema.it](mailto:info@sovema.it)

[www.bitrode.com](http://www.bitrode.com)



©2017 Bitrode Corp.


# DTV

## High Current Discharge Battery Testing System



### System Options

- Temperature, pressure, flow rate, and cell voltage monitoring
- Digital inputs and Digital outputs with function assigned per individual program
- Expression-based program limit conditions
  - Internal resistance calculation
  - Integration with Battery Management Systems: CAN
  - Ramp discharge
  - Constant resistance discharge
- Remote Input Output (RIO) box reduces excessive cable lengths when connecting to remote test stations
- Parallel controller (PCC) can control up to four circuits from separate units for higher power or higher current programs
- LCD display
- Custom-designed test leads

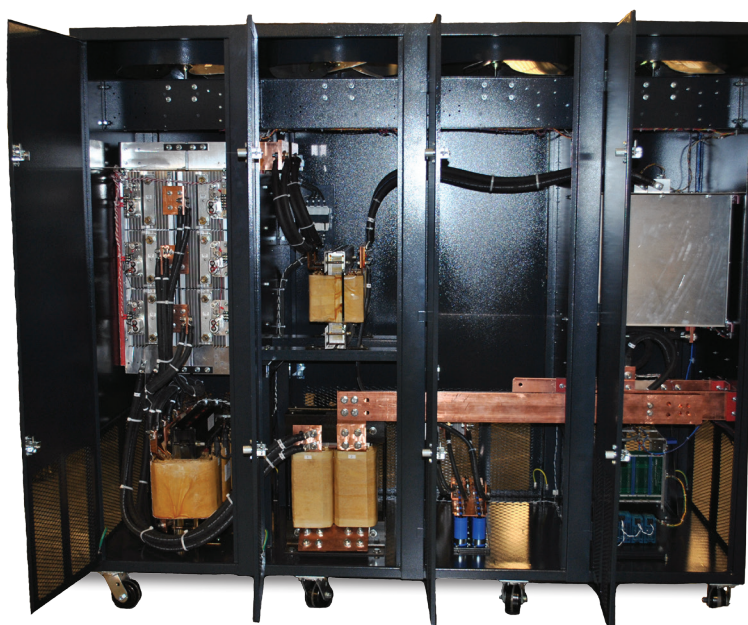

BITRODE HEADQUARTERS  
9787 Green Park Industrial Drive  
St. Louis, Missouri 63123 - USA  
tel: +1 636 343-6112  
fax: +1 636 343-7473  
email: [info@bitrode.com](mailto:info@bitrode.com)

SOVEMA  
Via Spagna, 13  
37069 Villafranca di Verona - Italy  
tel: +39 (045) 6335711  
fax: +39 (045) 6303911  
email: [info@sovema.it](mailto:info@sovema.it)

[www.bitrode.com](http://www.bitrode.com)

©2017 Bitrode Corp.

